



TS2000

TS2000 / 2011 / 2022

Access Control
Turnstile Range



TS2000 - Tripod Turnstile

TS2011 - Tripod Turnstile with controller and RFID Reader

TS2022 - Tripod Turnstile with controller and fingerprint & RFID Reader

Features

Standard Features

- Alloy steel tripod hub
- Manufactured from SUS304 stainless steel
- Drop arm for emergencies
- Fluent operation for heavy traffic
- Anti-tailgate

Enhanced Features

- Integrated with controller on biometric & RFID models
- Electrical interface inside for 3rd-party devices

Software

- ZK Access Control Management 5.2

Alternative & Related Options



inBio Controllers



TS1000



F12



RFID



MultiBio700




KR600

Specifications

- Power: AC220V / 110V, 50 / 60Hz
- Operating Temperature: -28°C ~ 60°C
- Operating Humidity: 5% ~ 85%
- Environment: Indoor / Outdoor (need enclosure)
- Rated Power: 60W
- Flow Rate: 25 ~ 48 passing / minute
- Ingress Protection: IP54
- Material: SUS304 stainless steel
- Pictogram Indication: Yes
- Control System: Input controlled by dry contact
- Emergency Input: Yes
- Optional Functions: 3rd-party controller integration, ticket system, counter
- Dimensions: 1110 X 980 X 760mm
- Package Dimensions: 1200 X 1080 X 380mm
- Weight: Net: 46kg / Gross: 54kg

Dimensions

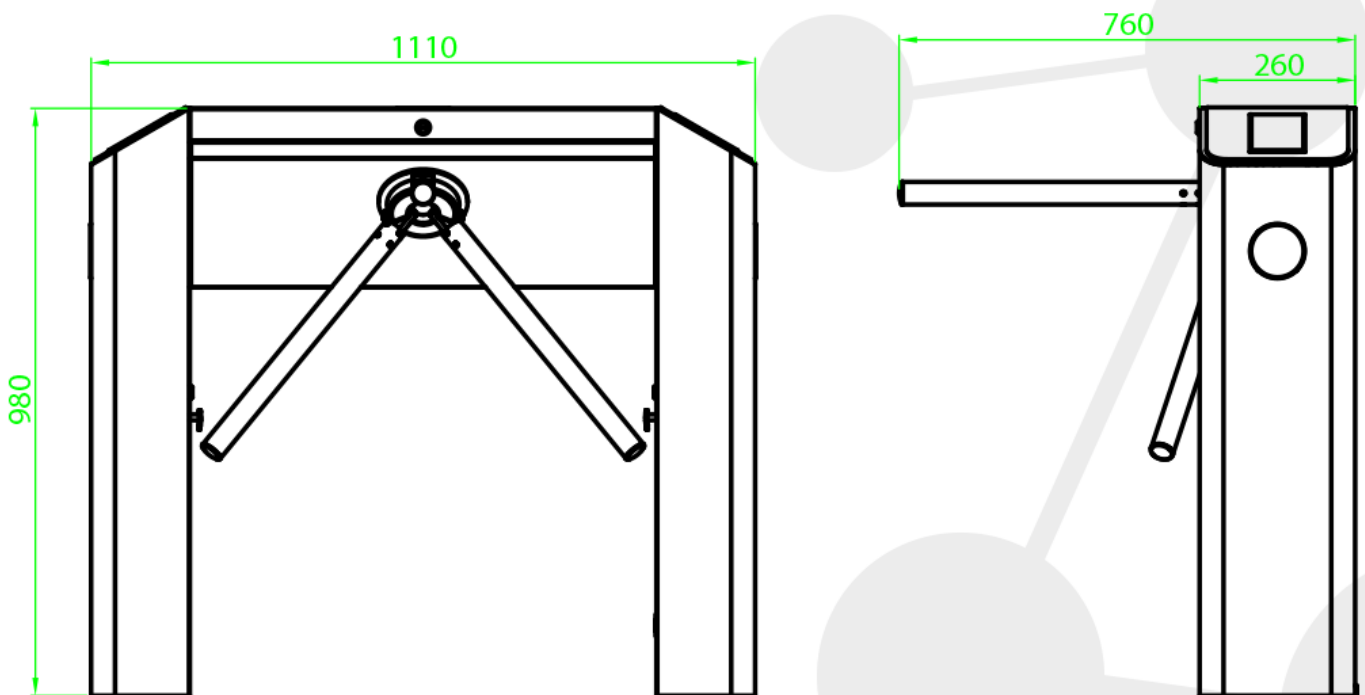

ZKTeco, ZKSoftware, ZKAccess, ZKIVision, ZKBioblock, ZKAFIS are either registered trademarks or trademarks of ZKTECO INC and ZKTeco South Africa.

You must obtain written and signed permission from ZKTECO before using any photograph owned or licenced by ZKTECO.

Copyright © 1998-2014 ZKTECO INC. All rights reserved.