

FR1500-WP

Flush-Mounted RS-485 Fingerprint Slave Reader



Features

- Single gang Standard junction box installation.
- Flush-Mounted Design for neat installation.
- RS-485 Communication Interface.
- SilkID Fingerprint Sensor.
- Stainless Steel Front casing.
- Fingerprint Protective Cover.
- Waterproof

Accessories

Overview

The Rainshield protects your device from harsh weather and sunlight tarnishing the outer materials. The Rainshields and backboxes are made from mild steel and powder coated with black but the powder coating color can be changed on request.

The Backbox fits inside the rainshield and allows for neat and adequate cable management.



FR1500 RAINSHIELD



FR1500 BACKBOX

Specifications

Additional Info

Working Temperature: -10 °C ~ 45 °C
 Working Humidity: 20 ~ 95%
 Dimensions(LxWxH): 121.3 × 77.3 × 38 mm
 Algorithm: ZKFinger v10.0

Power Supply

Operating Voltage 12V DC
 Stand-by Mode Power Consumption:12V*60mA=0.72W
 Peak Current of Fingerprint scanning:140mA

Hardware

1.0 GHz CPU
 ZKSilkID Sensor
 Buzzer Prompt
 Three-color Indicator Light

Compatibility

inBio/inBioPro Controllers
 Standalone Fingerprint Devices


Optional Features

125KHz RFID Card
 125KHz HID Prox Card
 13.56MHz MifareCard(S50 / S70)
 13.56MHz HID Iclass Card

Communication

RS485

Configuration

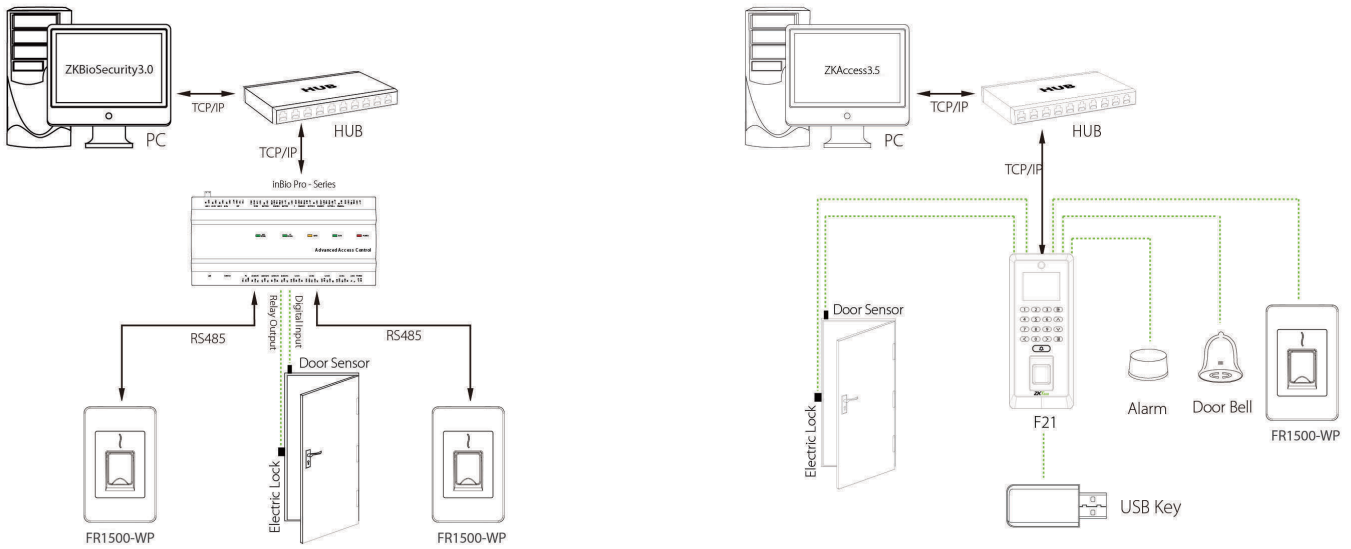

Dimensions (mm)

